


The thermal jumpers are electrically isolated and can be used in both, RF and DC applications.

Metalization options: The thermal jumpers are offered with standard or extended metalization. See page 107 regarding extended metalization.

Our thermal jumpers are RoHS compliant.

Standard Metalization:

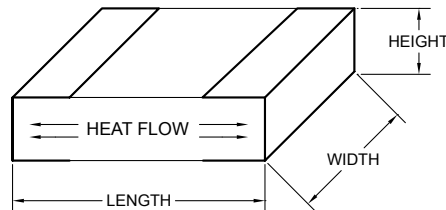

Aluminum Nitride

Part Number	Length (in)	Width (in)	Thickness (in)	Thermal Resistance (°C/W)	Capacitance (pF)
RTC0505-25NW	0.050	0.050	0.025	9.2	0.150
RTC0603-25NW	0.060	0.030	0.025	18	0.075
RTC0805-25NW	0.080	0.050	0.025	15	0.070
RTC1005-25NW	0.100	0.050	0.025	18	0.042
RTC1206-25NW	0.120	0.060	0.025	18	0.038
RTC1020-25NW	0.100	0.200	0.025	4.63	0.170

Ordering Information:

Example:

